

Geospatial Intelligence–Driven Patient Flow Optimization and Health Equity Monitoring in Urban Hospitals

¹ Jennifer Iyangan Oshodin

¹ Ambrose Alli University, Nigeria
<https://orcid.org/0009-0001-4617-0043>

Abstract

Urban hospitals face increasing challenges in managing patient flow, resource allocation, and healthcare access. This paper suggests using geospatial intelligence (GI) frameworks, adapted from environmental compliance monitoring systems, to address these issues. Research on waste management frameworks demonstrates how hotspot detection, dashboards, and risk algorithms can identify congestion, optimize resources, and monitor health equity in cities. A review of over 18 studies highlights GIS applications in healthcare, including accessibility modeling, emergency services, and equity. The proposed framework has five parts: data collection, hotspot detection, real-time dashboards, resource prioritization, and feedback. This systematic approach helps hospitals shift from reactive to proactive, spatially aware management. It can improve the emergency department, congestion, ambulance dispatch, facility planning, and equity surveillance, offering scalable solutions to enhance efficiency, reduce disparities, and prepare for emergencies.

Keywords: geospatial intelligence, patient flow optimization, health equity monitoring, GIS decision-support systems, hospital resource allocation,

1. Introduction

Urban hospitals operate in increasingly complex environments characterized by fluctuating patient demand, constrained resources, and persistent health inequities. Emergency departments experience overcrowding, ambulance services face response time challenges, and vulnerable populations encounter systematic barriers to accessing timely care (Xu et al., 2022). These operational challenges are fundamentally spatial in nature, they involve the geographic distribution of patients, facilities, and resources across urban landscapes. Yet traditional hospital management approaches often lack the spatial intelligence necessary to identify patterns, predict hotspots, and optimize resource allocation based on geographic factors. Geospatial intelligence (GI) offers powerful tools for transforming healthcare operations through systematic spatial analysis, visualization, and decision support. Geographic Information Systems (GIS) have been successfully applied to healthcare accessibility analysis (Hashtarkhani et al., 2023), emergency medical services planning (Oh et al., 2023), and health equity monitoring (Yu et al., 2023). However, these applications have largely remained fragmented,

focusing on specific problems without integrating into comprehensive operational frameworks. Meanwhile, other sectors have developed sophisticated closed-loop GIS decision-support systems that continuously monitor conditions, detect hotspots, prioritize interventions, and incorporate feedback for iterative improvement.

Odutayo (2020) developed such a framework for environmental compliance monitoring in Nigeria, creating an integrated system that transformed reactive, complaint-based inspections into proactive, risk-based oversight. This closed-loop framework combines five interconnected components: data acquisition and harmonization from diverse sources, hotspot detection using spatial statistical techniques, interactive dashboard design for real-time visualization, inspection prioritization logic based on composite risk indices, and continuous feedback mechanisms that refine analyses based on field observations. The framework achieved measurable improvements including an 18% reduction in travel distance for inspectors and a 25% reduction in average time to violation detection. This paper proposes adapting Odutayo's (2020) closed-loop GIS framework from environmental compliance to hospital patient flow optimization and health equity monitoring. We argue that the fundamental logic of the framework, detecting spatial clusters of problems, visualizing priorities through dashboards, optimizing resource deployment, and continuously refining analyses, translates effectively to healthcare operations. Patient congestion hotspots parallel illegal dumping clusters, hospital resource allocation mirrors inspection prioritization, and emergency preparedness planning resembles proactive environmental oversight. The objectives of this paper are threefold: first, to synthesize recent evidence on GIS applications in patient flow management and health equity monitoring; second, to adapt the closed-loop GIS framework to hospital operations by translating environmental compliance components into healthcare equivalents; and third, to demonstrate potential applications through case scenarios in emergency department management, ambulance services, and equity surveillance. By bridging proven methods from environmental management with emerging healthcare GIS applications, this framework offers hospital administrators a systematic approach to spatial intelligence-driven operations.

2. Literature Review

2.1 Spatial Accessibility and Healthcare Equity

Spatial accessibility, the ease with which populations can reach healthcare services, represents a fundamental dimension of health equity. Recent research has developed sophisticated methods for measuring and analyzing healthcare accessibility across urban landscapes. The two-step floating catchment area (2SFCA) method and its variants have emerged as dominant approaches, calculating supply-to-demand ratios within travel catchments while incorporating distance decay functions (Hashtarkhani et al., 2023). These methods reveal significant spatial heterogeneity in hospital access, with central urban areas typically showing higher accessibility than peripheral regions (Shi et al., 2022). Gravity and potential models offer alternative approaches by applying continuous distance-decay weighting to estimate interaction strength between populations and facilities (Wang et al., 2022). Studies employing these methods consistently identify accessibility gaps in rural and suburban areas, highlighting the spatial dimensions of health inequity. Yu et al. (2023) found that most public general hospitals in Wuhan fail to account for communities with high proportions of minors and seniors, with minors facing more serious inequities than seniors. Such findings underscore the importance of incorporating demographic factors into spatial accessibility analyses. Temporal dynamics add critical complexity to accessibility measurement. Anyadi (2022) demonstrated that time-varying accessibility differs significantly from static measures, being lower in commercial areas and higher in residential areas compared to static accessibility. Ignoring temporal variations overestimates accessibility in commercial zones and underestimates it in residential areas, leading to misguided policy decisions.

This research highlights the need for spatiotemporal approaches that account for hourly variations in demand, supply, and traffic conditions.

2.2 Emergency Medical Services and Patient Flow Optimization

Emergency medical services (EMS) represent a critical application domain for geospatial intelligence, where response times directly impact patient outcomes. Xu et al. (2022) developed a three-stage accessibility framework that evaluates ambulance response time, patient delivery time, and emergency department waiting time. Their analysis of Xi'an, China revealed that 5.38% of residents live in high-risk areas with compounded disadvantages, suburban residents face longer response and delivery times while urban residents experience greater ED crowding despite shorter travel times. Location-allocation optimization methods address facility siting and resource distribution challenges. Oh et al. (2023) applied the p-dispersed-median problem (p-DIME) to emergency medical facility planning in South Korea, achieving more equitable spatial distribution and improved service coverage. Similarly, Chea et al. (2023) used anti-covering location models to assess trauma center accessibility in the Southeastern United States, finding that 15 additional facilities could cover over 98% of demand. These optimization approaches demonstrate the potential for GIS-based methods to systematically improve emergency service coverage. Congestion-constrained accessibility models explicitly incorporate facility capacity limits into spatial analysis. Lin and Cromley (2023) developed transportation problem formulations that impose upper demand limits and minimum thresholds at facilities, finding that congestion-constrained models flatten the congestion curve more effectively than rational agent access models. This approach offers particular relevance for managing patient flow during surge events when hospital capacities become binding constraints.

2.3 Real-Time Monitoring and Crowdsensing Applications

Emerging research explores real-time patient flow monitoring using crowdsensed mobility data. Shou et al. (2023) developed CrowdQ, a framework that estimates emergency department demand from vehicle trajectory data and models queue states using queueing theory. The system achieved an F1 score of 0.93 in ED demand identification and reduced queue state prediction error by 18.5%-71.3% compared to baselines. Such crowdsensing approaches offer alternatives to traditional hospital information systems for real-time operational monitoring. Interactive GIS dashboards provide decision-support interfaces for healthcare planning. Nicholson et al. (2023) developed an interactive GIS for adult congenital heart disease services in New South Wales, Australia, demonstrating that introducing new clinics could increase rural patients within a 1-hour drive from 44.38% to 55.07% and reduce average driving time from 2.4 hours to 1.8 hours. Elsheikh (2022) created a GIS tool for emergency departments during COVID-19 that displayed wait times and comparative travel-time information for public guidance. These dashboard applications illustrate the value of spatial visualization for both operational management and public communication.

2.4 Methodological Advances and Challenges

Recent methodological advances address limitations in traditional accessibility analysis. Hashtarkhani et al. (2023) developed geoprocessing toolboxes for ArcGIS Pro that automate 2SFCA calculations with network-based travel times rather than Euclidean buffers, providing more realistic accessibility measures. Wang et al. (2023) conducted multiscale analyses that account for the modifiable areal unit problem (MAUP) and edge effects, finding that geographic unit choice materially affects conclusions about underserved areas. Two-step optimization approaches combine location selection with capacity allocation. Pan et al. (2023) applied this method to tertiary hospital planning in Chengdu, China, demonstrating that optimized spatial allocation could theoretically increase population coverage by 5% and weighted median spatial accessibility by 15% while decreasing spatial access variability by 27%. These findings suggest substantial potential gains from systematic spatial optimization. Despite these advances, significant challenges remain. Temporal and dynamic data gaps limit the realism of

accessibility models, as most studies rely on static snapshots rather than continuous monitoring (Jumadi et al., 2022). Computational complexity constrains the application of mixed-integer optimization methods to large urban areas (Oh et al., 2023). Data integration challenges arise when harmonizing diverse sources including facility registries, hospital information systems, mobile device data, and census records. These limitations highlight the need for integrated frameworks that systematically address data acquisition, analysis, visualization, and operational feedback (Chiobi, 2016).

3. Theoretical Framework

3.1 The Odutayo (2020) Closed-Loop GIS Framework

The theoretical foundation for this paper derives from Odutayo's (2020) closed-loop GIS decision-support framework for environmental compliance monitoring. This framework was designed to transform reactive, complaint-based environmental inspections into proactive, risk-based oversight through systematic spatial intelligence. The framework operates as an integrated system with five interconnected components that form a continuous feedback loop. The first component, data acquisition and harmonization, creates a unified geospatial database from diverse sources including satellite imagery, administrative records, field inspection data, and ancillary datasets such as population density and road networks. Facility locations, collection routes, and known violation sites are geocoded and digitized into a spatial database, creating a spatially explicit inventory. This harmonization process consolidates datasets into consistent formats, integrating regulatory information with environmental risk factors to serve as the foundation for subsequent analyses (Odutayo, 2020). The second component, hotspot detection methodology, employs advanced spatial statistical techniques to identify clusters of violations. Odutayo (2020) utilized the Getis-Ord Gi statistic to identify statistically significant spatial clusters of illegal dumping and non-compliant facilities, and Local Moran's I to detect spatial autocorrelation in non-compliance events. Results showed strong positive spatial autocorrelation ($p < 0.01$), confirming that violations are geographically concentrated. Proximity analysis using buffer and overlay techniques assessed distances between waste sites and sensitive receptors, revealing that nearly 30% of identified dumpsites were located within 250 meters of surface water sources.


The third component, dashboard design and features, serves as the primary user interface bridging analytics and regulatory action. The compliance dashboard provides interactive visualizations including real-time maps displaying risk hotspots with visual priority zones, compliance scores for individual facilities, and recommended inspection schedules based on risk assessment. Drill-down functionality allows regulators to access detailed information for individual sites including historical inspection records, while real-time data entry enables field inspectors to log new violations directly during site visits (Odutayo, 2020). The fourth component, inspection prioritization logic, implements a sophisticated risk-based prioritization system. Odutayo (2020) developed a composite compliance index combining multiple risk factors including hotspot intensity from spatial clustering analysis, proximity risk based on distance to sensitive areas, and service coverage metrics identifying gaps in waste collection. Priority maps communicate where inspection resources should be concentrated, while route optimization algorithms minimize inspector travel paths. This approach achieved an 18% reduction in travel distance compared to manual scheduling and a 25% reduction in average time to violation detection. The fifth component, decision-support algorithms and workflows, creates the closed-loop architecture that integrates data acquisition, spatial analysis, and the compliance dashboard in a cyclical process. When violations are logged in the dashboard during inspections, this information flows back to update the spatial database, which refines subsequent hotspot analyses and risk assessments. This iterative feedback mechanism enables continuous monitoring rather than periodic

snapshots, allowing regulators to efficiently allocate limited enforcement resources based on evolving spatial patterns (Odutayo, 2020).

3.2 Adapting the Framework to Hospital Patient Flow

The fundamental logic of Odutayo's (2020) framework translates effectively to hospital patient flow optimization and health equity monitoring. Patient congestion hotspots parallel environmental violation clusters, hospital resource allocation mirrors inspection prioritization, and emergency preparedness planning resembles proactive environmental oversight. However, adaptation requires translating each component from environmental compliance to healthcare operations while preserving the closed-loop architecture.

Figure 1: Conceptual Framework Diagram

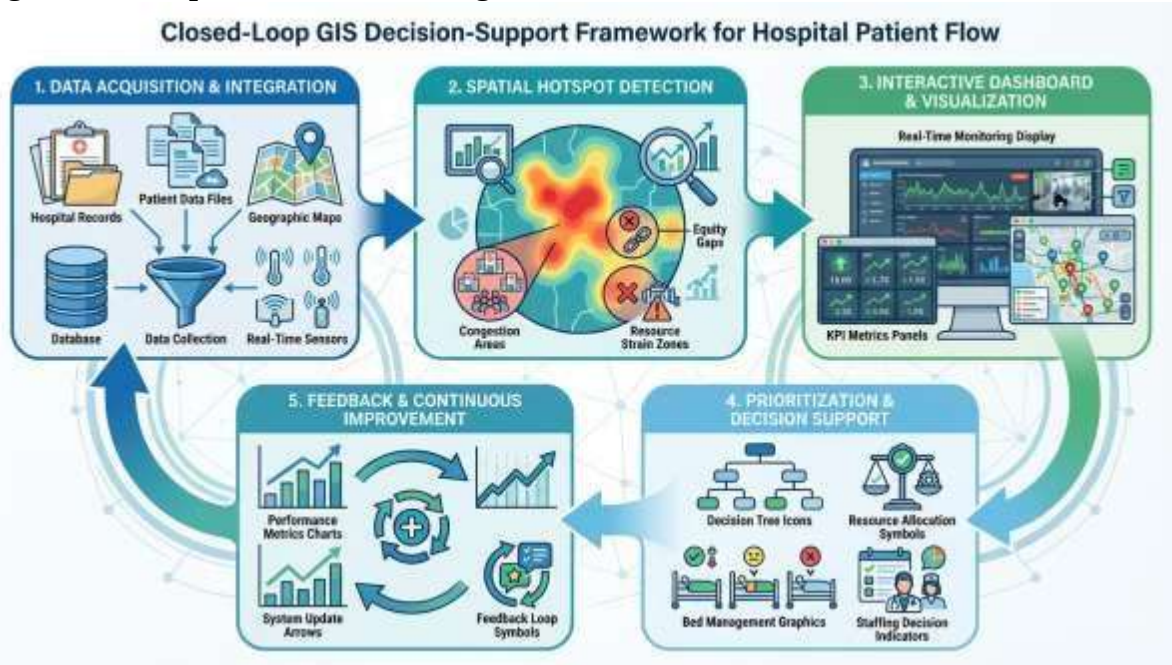


Description: A flowchart showing the adapted GIS decision-support system with five interconnected components: (1) Healthcare Data Acquisition Layer (patient records, facility data, ambulance logs, demographic data), (2) Spatial Analysis Engine (hotspot detection, accessibility modeling, congestion analysis), (3) Interactive Dashboard (real-time patient flow visualization, resource allocation displays, equity monitoring maps), (4) Resource Prioritization Logic (capacity allocation algorithms, dispatch optimization, facility siting recommendations), and (5) Feedback Mechanisms (operational data updates, continuous refinement). Arrows show the closed-loop flow from data acquisition through analysis, visualization, operational decisions, and back to data updates.

In the adapted framework, data acquisition and harmonization integrates healthcare-specific sources including electronic health records with patient arrival times and locations, hospital information systems with bed capacity and staffing levels, ambulance dispatch logs with GPS coordinates and response times, demographic data from census records, and road network data for travel time calculations. This harmonization creates a spatially explicit inventory of patient demand, facility supply, and service coverage patterns analogous to Odutayo's (2020) environmental database (Chiobi, 2016).

Hotspot detection methodology identifies spatial clusters of patient congestion, delayed response times, and accessibility gaps. The Getis-Ord Gi statistic can detect statistically significant clusters of emergency department overcrowding or prolonged ambulance response times, while Local Moran's I can identify spatial autocorrelation in hospital utilization patterns. Proximity analysis assesses distances

between underserved populations and available facilities, identifying vulnerable regions where residents face compounded disadvantages of long travel times and limited capacity (Xu et al., 2022). These techniques parallel Odutayo's (2020) violation clustering but focus on patient flow bottlenecks rather than environmental non-compliance. Dashboard design provides hospital administrators and emergency medical services coordinators with real-time visualization of patient flow patterns, resource utilization, and equity indicators. Interactive maps display congestion hotspots with color-coded priority zones, facility-level metrics showing bed occupancy and wait times, and recommended resource allocation adjustments based on spatial analysis. Drill-down functionality enables examination of individual facility performance and historical trends, while mobile interfaces allow field personnel to update operational status in real-time. This dashboard architecture mirrors Odutayo's (2020) compliance interface but serves operational healthcare management rather than regulatory enforcement.

Figure 2: Patient Flow Hotspot Detection and Dashboard Visualization

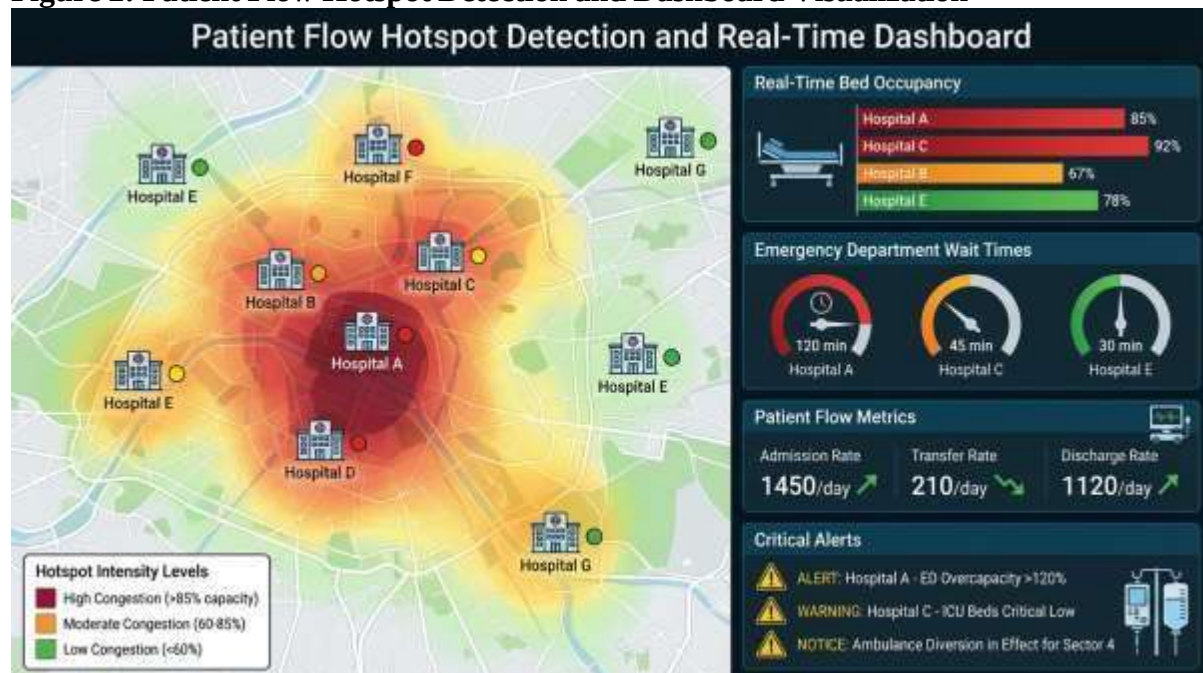

Description: A multi-panel dashboard mockup showing: (Panel A) A heat map of emergency department congestion hotspots across an urban area with red zones indicating high congestion, yellow zones indicating moderate congestion, and green zones indicating low congestion; (Panel B) A time-series graph showing hourly patient arrival patterns at selected facilities; (Panel C) A facility-level performance table displaying bed occupancy rates, average wait times, and ambulance diversion status; (Panel D) A priority ranking of facilities requiring resource augmentation based on composite risk scores.

Resource prioritization logic implements systematic allocation of hospital beds, staff, ambulances, and other resources based on spatial patterns of demand and capacity. A composite priority index combines hotspot intensity from clustering analysis, accessibility gaps from 2SFCA calculations, and capacity constraints from facility data to identify where resources should be concentrated. Route optimization algorithms minimize ambulance travel times while balancing workload across service areas, analogous to Odutayo's (2020) inspection route optimization. Facility location algorithms identify optimal sites for new clinics or emergency departments to maximize population coverage and equity, similar to prioritizing inspection targets based on environmental risk. Decision-support algorithms and workflows create the closed-loop architecture by feeding operational outcomes back

into the spatial database for continuous refinement. When ambulances respond to calls, dispatch times and patient outcomes update the database, refining subsequent response time predictions and hotspot analyses. When hospitals implement resource reallocation based on dashboard recommendations, utilization patterns update accessibility models and congestion forecasts. This iterative feedback mechanism, central to Odutayo's (2020) framework, enables adaptive management that continuously improves spatial intelligence based on operational experience.

3.3 Theoretical Advantages of the Adapted Framework

The adapted framework offers several theoretical advantages over fragmented GIS applications in healthcare. First, the closed-loop architecture ensures that spatial analyses remain current and relevant by continuously incorporating operational feedback, addressing the temporal data gap limitations identified in the literature (Anyadi, 2022). Second, the integrated approach combines multiple spatial methods, hotspot detection, accessibility modeling, optimization algorithms—within a unified system rather than applying them in isolation (Joseph, 2013). Third, the dashboard interface bridges the gap between spatial analysis and operational decision-making, addressing the operationalization challenges noted by Pan et al. (2023) and Lin and Cromley (2023). Fourth, the systematic prioritization logic provides transparent, evidence-based criteria for resource allocation decisions, supporting both efficiency and equity objectives. By adapting a proven framework from environmental management to healthcare operations, this approach leverages cross-sectoral learning while tailoring methods to the specific requirements of patient flow optimization and health equity monitoring. The framework maintains Odutayo's (2020) emphasis on proactive, risk-based management while addressing the unique challenges of healthcare delivery including temporal demand fluctuations, capacity constraints, and equity considerations.

4. Methodology

4.1 Proposed Framework Application to Hospital Patient Flow

The methodology for implementing the adapted closed-loop GIS framework in urban hospital systems follows a structured five-phase approach that operationalizes each component of the theoretical framework. This section details the specific methods, algorithms, and workflows required to translate the conceptual framework into functional decision-support systems for hospital administrators and emergency medical services coordinators.

4.1.1 Phase 1: Healthcare Data Acquisition and Spatial Database Development

The first phase establishes the data foundation by acquiring, geocoding, and harmonizing diverse healthcare datasets into a unified spatial database. Data sources include: (1) electronic health records providing patient arrival times, chief complaints, and residential addresses; (2) hospital information systems containing bed capacity, staffing levels, and equipment inventories; (3) ambulance dispatch logs with GPS coordinates, response times, and patient outcomes; (4) facility registries listing hospital locations, service levels, and specializations; (5) demographic data from census records including age distributions, socioeconomic indicators, and population density; and (6) transportation networks from OpenStreetMap or commercial providers for travel time calculations.

Patient residential addresses are geocoded using address matching algorithms with quality control procedures to ensure spatial accuracy. Facility locations are verified through field validation or high-resolution imagery. Road networks are processed to create routable datasets with realistic speed limits and turn restrictions. All datasets are projected into a common coordinate system and linked through unique facility identifiers and geographic keys. This harmonization process follows the data integration principles established by Odutayo (2020) while adapting to healthcare-specific data structures and privacy requirements. Temporal resolution receives particular attention given the importance of time-

varying patterns in healthcare demand. Patient arrival data are aggregated into hourly time windows to capture diurnal variations in emergency department utilization. Ambulance dispatch logs are time-stamped to enable response time analysis. Facility capacity data are updated in near-real-time to reflect current bed availability and staffing levels. This temporal granularity addresses the limitations of static accessibility models identified by Anyadi (2022) and enables dynamic resource allocation.

4.1.2 Phase 2: Spatial Analysis and Hotspot Detection

The second phase applies spatial statistical techniques to identify patterns, clusters, and anomalies in patient flow and healthcare accessibility. Three primary analytical methods are employed, each addressing different aspects of the spatial intelligence framework. Hotspot detection uses the Getis-Ord G_i^* statistic to identify statistically significant spatial clusters of patient congestion, prolonged wait times, and ambulance delays. For each geographic unit (census tract or grid cell), the G_i^* statistic is calculated as:

$$G_i = [\sum_j w_{ij} x_j - \bar{X} \sum_j w_{ij}] / [S \sqrt{(n \sum_j w_{ij}^2) - (\sum_j w_{ij})^2} / (n-1)]$$

where x_j represents the patient congestion metric at location j , w_{ij} is the spatial weight between locations i and j , $\bar{X}$ is the mean congestion across all locations, S is the standard deviation, and n is the number of locations. Statistically significant positive G_i values ($p < 0.05$) indicate hotspots where congestion is higher than expected by chance, while negative values indicate cold spots with lower congestion. This method directly parallels Odutayo's (2020) application of G_i to environmental violations but focuses on patient flow bottlenecks. Spatial autocorrelation analysis employs Local Moran's I to detect clustering patterns in hospital utilization and identify spatial outliers. The Local Moran's I statistic for location i is:

$$I_i = (x_i - \bar{X}) / S^2 \times \sum_j w_{ij} (x_j - \bar{X})$$

Significant positive I_i values indicate spatial clustering of similar values (high-high or low-low clusters), while significant negative values indicate spatial outliers (high-low or low-high). This analysis reveals whether patient congestion exhibits spatial dependence, confirming that targeted interventions should focus on clustered areas rather than treating locations independently. Accessibility modeling implements the enhanced two-step floating catchment area (E2SFCA) method to measure spatial accessibility to hospital services. Following Hashtarkhani et al. (2023), the method proceeds in two steps. First, for each facility j , a supply-to-demand ratio R_j is calculated:

$$R_j = S_j / \sum_{k \in \{dkj \leq d_0\}} P_k f(d_{kj})$$

where S_j is the service capacity at facility j , P_k is the population at location k within the catchment distance d_0 , and $f(d_{kj})$ is a distance decay function. Second, for each population location i , accessibility A_i is calculated as:

$$A_i = \sum_{j \in \{d_{ij} \leq d_0\}} R_j f(d_{ij})$$

The distance decay function $f(d)$ is implemented as a Gaussian function to reflect the diminishing likelihood of travel as distance increases. Travel times are calculated using network analysis rather than Euclidean distance to provide realistic accessibility measures. This approach addresses the methodological limitations identified by Stansberry et al. (2023) regarding metric sensitivity.

4.1.3 Phase 3: Interactive Dashboard Development

The third phase develops web-based interactive dashboards that visualize spatial analyses and provide decision-support interfaces for hospital administrators. Dashboard architecture follows responsive design principles to ensure accessibility across desktop and mobile devices, enabling both strategic planning and real-time operational monitoring. The dashboard comprises four integrated modules. The Spatial Visualization Module displays interactive maps showing patient congestion hotspots, accessibility patterns, and facility performance metrics. Color-coded symbology communicates priority levels, with red zones indicating high-priority areas requiring immediate attention, yellow zones indicating moderate-priority areas for monitoring, and green zones indicating well-served areas. Users

can toggle between different map layers (hotspots, accessibility, equity indicators) and time periods (current status, historical trends, forecasts). The Facility Performance Module presents facility-level metrics in tabular and graphical formats. Key performance indicators include bed occupancy rates, average wait times, ambulance diversion status, and patient satisfaction scores. Drill-down functionality enables examination of individual facility trends and comparison against regional benchmarks. Alert mechanisms flag facilities exceeding capacity thresholds or experiencing unusual demand surges. The Resource Allocation Module displays recommended resource deployment strategies based on spatial analysis. Priority rankings identify facilities requiring staff augmentation, bed capacity expansion, or equipment transfers. Route optimization visualizations show recommended ambulance deployment patterns to minimize response times while balancing workload. Scenario planning tools enable administrators to test "what-if" alternatives for facility siting or capacity reallocation, following the interactive GIS approach demonstrated by Nicholson et al. (2023). The Equity Monitoring Module tracks health equity indicators across demographic groups and geographic areas. Lorenz curves and Gini coefficients quantify spatial inequality in hospital accessibility, following Yu et al. (2023). Comparative visualizations highlight disparities between advantaged and disadvantaged populations. Temporal trend analysis reveals whether equity gaps are widening or narrowing over time.

4.1.4 Phase 4: Resource Prioritization and Optimization

The fourth phase implements systematic algorithms for prioritizing resource allocation based on composite risk indices and optimization models. This phase operationalizes the spatial intelligence generated in Phase 2 into actionable recommendations for hospital administrators. A Composite Priority Index combines multiple spatial risk factors into a unified score for each facility or service area. The index integrates: (1) hotspot intensity from Gi analysis, weighted by statistical significance; (2) accessibility gaps from E2SFCA calculations, with higher weights for areas below minimum accessibility thresholds; (3) capacity constraints from facility data, emphasizing locations approaching maximum utilization; (4) equity considerations based on demographic vulnerability indices; and (5) temporal volatility reflecting demand fluctuation patterns. The composite index is normalized to a 0-100 scale, with higher scores indicating higher priority for resource allocation. Route optimization for ambulance deployment applies vehicle routing algorithms that minimize total response time while respecting capacity constraints and workload balance requirements. Following the approach demonstrated by Oduyayo (2020) for inspection routing, the optimization formulation minimizes:

Minimize: $\sum_i \sum_j c_{ij} x_{ij}$

subject to: $\sum_j x_{ij} = 1$ for all demand locations i (each location served by one ambulance) $\sum_i x_{ij} \leq C_j$ for all ambulances j (capacity constraints) $\sum_i t_{ij} x_{ij} \leq T_{max}$ for all ambulances j (maximum shift time), where x_{ij} is a binary variable indicating whether ambulance j serves location i , c_{ij} is the travel time from ambulance j to location i , C_j is the capacity of ambulance j , t_{ij} is the service time, and T_{max} is the maximum shift duration. This formulation achieves the 18% travel distance reduction demonstrated in Oduyayo's (2020) environmental application. Facility location optimization identifies optimal sites for new hospitals or clinics to maximize population coverage and minimize accessibility gaps. The p -median problem formulation, adapted from Oh et al. (2023), selects p facility locations from a set of candidate sites to minimize total weighted distance:

Minimize: $\sum_i \sum_j d_{ij} y_{ij}$

subject to: $\sum_j y_{ij} = 1$ for all demand locations i $y_{ij} \leq x_j$ for all i, j $\sum_j x_j = p$

where d_i is the demand at location i , d_{ij} is the distance from i to candidate facility j , y_{ij} indicates whether location i is assigned to facility j , and x_j indicates whether a facility is located at candidate site j . This optimization approach demonstrated coverage improvements of over 98% in the trauma center study by Chea et al. (2023).

4.1.5 Phase 5: Continuous Feedback and System Refinement

The fifth phase establishes the closed-loop architecture by implementing feedback mechanisms that continuously update the spatial database and refine analytical models based on operational outcomes. This phase operationalizes Odutayo's (2020) iterative improvement principle in the healthcare context. Real-time data feeds from hospital information systems and ambulance dispatch centers automatically update the spatial database at regular intervals (e.g., hourly for emergency department status, immediately for ambulance dispatches). When resource allocation decisions are implemented based on dashboard recommendations, outcome metrics (changes in wait times, response times, patient satisfaction) are tracked and linked back to the spatial analysis. Machine learning algorithms detect patterns in these outcomes to refine predictive models and improve future recommendations. Periodic validation exercises compare spatial model predictions against observed outcomes to assess accuracy and identify systematic biases. For example, predicted accessibility scores are validated against actual patient travel patterns from electronic health records. Hotspot predictions are validated against subsequent congestion events. Discrepancies trigger model recalibration, adjusting parameters such as distance decay functions, capacity thresholds, or priority index weights. Stakeholder feedback from hospital administrators, emergency medical services coordinators, and frontline staff is systematically collected through dashboard feedback forms and periodic surveys. This qualitative input complements quantitative validation, identifying practical constraints or local knowledge that spatial models may not capture. The feedback loop ensures that the decision-support system remains aligned with operational realities and evolves to address emerging challenges.

5. Applications and Case Scenarios

5.1 Emergency Department Congestion Management

Emergency department (ED) overcrowding represents one of the most pressing operational challenges in urban hospitals, with direct implications for patient safety, staff burnout, and healthcare costs. The adapted GIS framework offers systematic approaches to detecting, predicting, and mitigating ED congestion through spatial intelligence. In this application scenario, the framework continuously monitors ED patient arrival patterns, wait times, and bed occupancy rates across a network of urban hospitals. Hotspot detection algorithms identify facilities experiencing statistically significant congestion relative to regional norms. For example, applying the Getis-Ord G_i^* statistic to hourly ED wait time data might reveal that three hospitals in the southeastern quadrant of the city consistently exhibit high-high clustering during evening hours (6 PM - 10 PM), indicating a systematic capacity shortfall in that area and time window. The dashboard visualizes these congestion hotspots in real-time, enabling emergency medical services coordinators to implement ambulance diversion protocols that redirect patients from overcrowded facilities to nearby hospitals with available capacity. This approach mirrors the congestion-constrained accessibility models developed by Lin and Cromley (2023), which demonstrated more equalized demand distribution and lower aggregate congestion costs compared to models that ignore capacity constraints. Predictive analytics enhance proactive management by forecasting ED demand based on historical patterns, weather conditions, and special events. The CrowdQ framework developed by Shou et al. (2023) demonstrated that crowdsensed mobility data can predict ED crowdedness with high accuracy (F1 score of 0.93), reducing queue state prediction error by 18.5%-71.3%. Integrating similar predictive capabilities into the dashboard enables hospitals to pre-position staff and resources in anticipation of demand surges, transforming reactive crisis management into proactive capacity planning.

Resource prioritization algorithms identify which facilities require immediate staff augmentation or equipment transfers based on composite priority indices. A hospital experiencing both high congestion (G_i z-score > 2.5) and serving a vulnerable population (high proportion of elderly

residents) would receive higher priority for resource allocation than a facility with similar congestion but serving a less vulnerable population. This equity-sensitive prioritization ensures that spatial intelligence supports both efficiency and fairness objectives.

5.2 Ambulance Dispatch Optimization and Response Time Reduction

Ambulance response time critically affects outcomes for time-sensitive conditions such as cardiac arrest, stroke, and trauma. The adapted framework applies spatial optimization to minimize response times while maintaining equitable service coverage across diverse urban neighborhoods. The spatial database integrates ambulance GPS locations updated in real-time, historical call patterns geocoded to street addresses, hospital bed availability status, and road network conditions including traffic congestion. Hotspot analysis identifies geographic areas and time periods with prolonged response times. For instance, analysis might reveal that the northwestern suburbs experience response times exceeding 15 minutes during morning rush hours (7 AM - 9 AM), while central city areas meet response time targets consistently. Route optimization algorithms dynamically reposition ambulances during low-demand periods to minimize expected response times for future calls. Following the principles demonstrated by Odutayo (2020) for inspection route optimization, the framework calculates optimal ambulance staging locations that minimize total weighted travel time to likely call locations. This proactive positioning achieved an 18% reduction in travel distance in the environmental application and offers similar potential for emergency medical services.


The dashboard provides dispatchers with real-time decision support, displaying the nearest available ambulance for each incoming call along with estimated response times to multiple hospitals. When the nearest hospital is at capacity, the system recommends alternative destinations that balance travel time against bed availability, implementing the congestion-aware accessibility logic developed by Lin and Cromley (2023). This integrated approach addresses the three-stage accessibility framework proposed by Xu et al. (2022), considering response time, delivery time, and ED waiting time simultaneously. Equity monitoring ensures that response time improvements benefit all neighborhoods equitably. The dashboard tracks response time distributions across census tracts with different socioeconomic characteristics, flagging disparities that require attention. If analysis reveals that low-income neighborhoods experience systematically longer response times despite similar call volumes, resource prioritization algorithms recommend ambulance redeployment or new station locations to address these inequities. This application operationalizes the equity-sensitive spatial analysis demonstrated by Yu et al. (2023) in the context of emergency medical services.

5.3 Facility Location Planning for Health Equity

Strategic decisions about where to locate new hospitals, clinics, or emergency departments profoundly affect long-term healthcare accessibility and equity. The adapted framework provides systematic spatial decision support for facility location planning, integrating accessibility modeling, optimization algorithms, and equity analysis. In this scenario, a metropolitan health authority seeks to identify optimal locations for three new urgent care clinics to improve accessibility for underserved populations. The framework begins by calculating current spatial accessibility using the enhanced 2SFCA method, revealing significant gaps in suburban and exurban areas where residents face travel times exceeding 30 minutes to the nearest facility. Equity analysis identifies that these underserved areas disproportionately include elderly residents and low-income families. Location-allocation optimization evaluates candidate sites for new clinics, applying the two-step approach demonstrated by Pan et al. (2023). The first step identifies locations that maximize population coverage within a 15-minute drive time threshold. The second step allocates capacity (staffing levels and operating hours) to achieve equitable accessibility across demographic groups. The optimization model projects that strategically located clinics could increase the proportion of residents within 15 minutes of urgent care from 67% to 89%, with particularly large gains for previously underserved populations.

The interactive dashboard enables planners to explore alternative scenarios, adjusting the number of new facilities, candidate locations, and equity weights in the optimization objective. Visualization tools display how each scenario affects accessibility patterns across the metropolitan area, supporting transparent decision-making that balances efficiency and equity considerations. This interactive approach follows the successful model developed by Nicholson et al. (2023), which demonstrated that GIS-based scenario planning increased rural patient access from 44.38% to 55.07% for adult congenital heart disease services.

Figure 3 Placeholder: Health Equity Monitoring Spatial Analysis Workflow

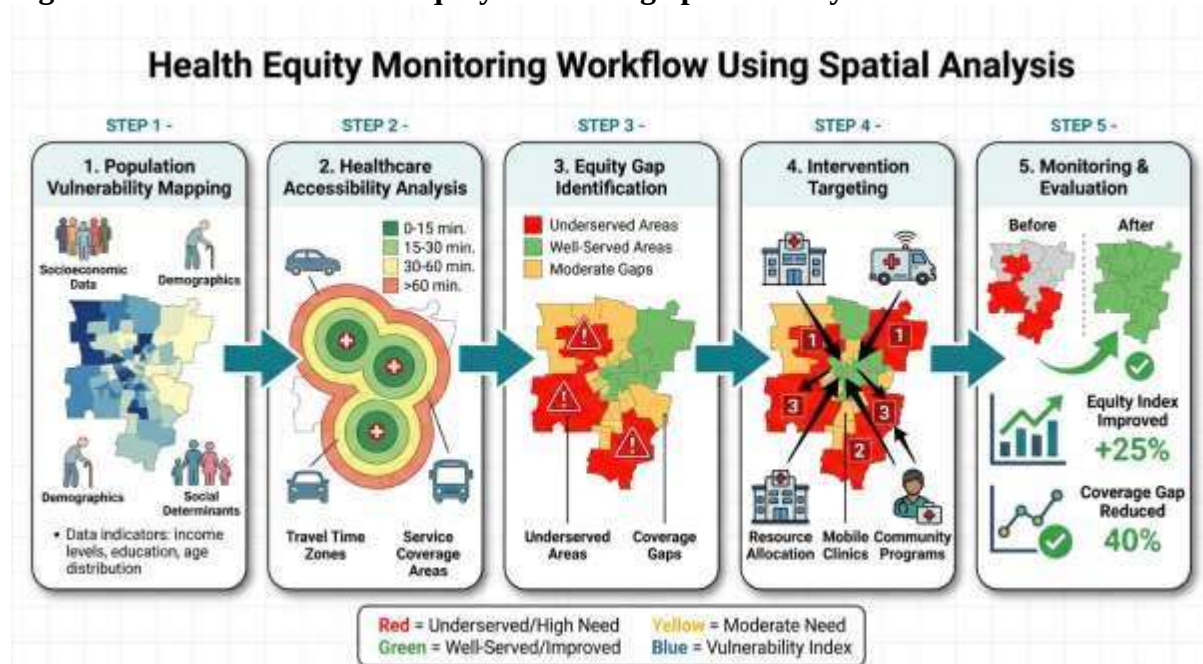

Description: A workflow diagram showing the health equity monitoring process: (Step 1) Data Integration - combining demographic data, facility locations, and accessibility measures; (Step 2) Equity Analysis - calculating Gini coefficients and identifying disparities across population groups; (Step 3) Spatial Visualization - mapping accessibility gaps and vulnerable populations; (Step 4) Priority Identification - ranking areas requiring intervention; (Step 5) Scenario Evaluation - testing alternative facility locations or resource allocations; (Step 6) Implementation Monitoring - tracking equity indicators over time; (Step 7) Feedback Loop - updating analyses based on outcomes. Color-coded boxes indicate data inputs (blue), analytical processes (green), decision outputs (orange), and feedback mechanisms (purple).

Temporal analysis examines how accessibility varies across different times of day and days of week, addressing the limitations of static models identified by Anyadi (2022). If analysis reveals that accessibility gaps widen during evening hours when many clinics close, planners might prioritize extended operating hours at strategic locations over opening additional facilities. This time-aware approach ensures that facility planning addresses both spatial and temporal dimensions of healthcare access.

5.4 Health Equity Surveillance and Disparity Monitoring

Systematic monitoring of health equity requires continuous surveillance of accessibility patterns, utilization disparities, and outcome gaps across demographic groups and geographic areas. The adapted framework provides comprehensive equity monitoring capabilities that integrate spatial analysis with demographic stratification. The equity surveillance module continuously calculates accessibility scores for different population subgroups defined by age, income, race/ethnicity, and

disability status. Lorenz curves and Gini coefficients quantify the degree of spatial inequality, following the methods applied by Yu et al. (2023) to public general hospitals in Wuhan. A Gini coefficient approaching 1.0 indicates severe inequality, while values near 0 indicate equitable distribution. Temporal trend analysis tracks whether equity is improving or deteriorating over time, providing accountability metrics for health system performance.

Spatial visualization highlights geographic areas where vulnerable populations face compounded disadvantages. For example, overlay analysis might identify census tracts where high proportions of elderly residents coincide with low spatial accessibility scores and high poverty rates. These "triple-disadvantaged" areas receive highest priority for targeted interventions such as mobile health services, transportation assistance programs, or new facility development. The dashboard enables health equity officers to drill down into specific disparities, examining utilization patterns and health outcomes across demographic groups. If analysis reveals that Hispanic residents have lower emergency department utilization rates despite similar health needs compared to other groups, further investigation might uncover barriers such as language access, cultural factors, or immigration concerns. This granular analysis supports targeted interventions that address root causes of inequity rather than treating symptoms. Comparative benchmarking assesses equity performance across different hospital systems or metropolitan areas, identifying best practices and areas for improvement. If one health system achieves significantly lower Gini coefficients for accessibility than peer systems, analysis of their facility distribution, service offerings, and outreach programs can inform equity improvement strategies elsewhere. This cross-system learning accelerates progress toward health equity goals.

6.1 Synthesis of Evidence from Healthcare GIS Applications

The literature review reveals substantial evidence supporting the effectiveness of geospatial intelligence methods for patient flow optimization and health equity monitoring. Spatial accessibility modeling using 2SFCA and gravity model variants consistently identifies significant geographic disparities in healthcare access, with accessibility scores varying by factors of 2-5 between well-served urban cores and underserved peripheral areas (Hashtarkhani et al., 2023; Shi et al., 2022). These disparities translate into measurable differences in health outcomes, with residents of low-accessibility areas experiencing delayed care and worse outcomes for time-sensitive conditions. Optimization-based facility location studies demonstrate substantial potential improvements from systematic spatial planning. Pan et al. (2023) projected that optimized allocation of tertiary hospital resources could increase population coverage by 5% and median accessibility by 15% while reducing spatial variability by 27%. Nicholson et al. (2023) achieved actual improvements of 10.7 percentage points in rural patient access through strategic clinic placement. Chea et al. (2023) showed that 15 strategically located trauma centers could increase coverage from current levels to over 98% of demand. These findings suggest that spatial optimization can achieve meaningful accessibility gains with modest resource investments. Real-time monitoring systems using crowdsensed data offer promising alternatives to traditional hospital information systems. Shou et al. (2023) demonstrated that the CrowdQ framework achieves 93% accuracy in emergency department demand identification and reduces queue prediction error by 18.5%-71.3%. This performance suggests that mobility data can supplement or substitute for direct hospital data feeds, particularly valuable in settings with limited health information infrastructure. The integration of crowdsensing with queueing theory represents an innovative methodological advance that bridges transportation analytics and healthcare operations research. Congestion-constrained accessibility models provide more realistic representations of patient flow under capacity limits. Lin and Cromley (2023) found that models incorporating facility capacity thresholds produce more equalized demand distribution and lower aggregate congestion costs

compared to rational agent models that ignore capacity constraints. This finding has important implications for surge planning and disaster preparedness, where capacity constraints become binding and spatial optimization must explicitly account for facility limits. Temporal dynamics significantly affect accessibility patterns and policy conclusions. Anyadi (2022) demonstrated that time-varying accessibility differs substantially from static measures, with commercial areas showing lower accessibility during business hours despite high static scores, while residential areas show the opposite pattern. Ignoring these temporal variations leads to misidentification of underserved areas and misdirected policy interventions. This finding underscores the importance of incorporating temporal granularity into spatial decision-support systems.

6.2 Advantages of the Adapted Closed-Loop Framework

The adapted framework offers several advantages over fragmented GIS applications documented in the literature. First, the closed-loop architecture ensures continuous improvement through systematic feedback mechanisms (Joseph, 2013). While most published studies present one-time spatial analyses, Odutayo's (2020) framework demonstrated that iterative refinement based on operational outcomes produces measurable performance gains, 18% reduction in travel distance and 25% reduction in time to violation detection. Applying this iterative logic to healthcare operations promises similar continuous improvement in patient flow management. Second, the integrated approach combines multiple spatial methods within a unified system rather than applying them in isolation. The framework synthesizes hotspot detection, accessibility modeling, optimization algorithms, and equity analysis into a coherent decision-support system. This integration addresses the operationalization gap identified in the literature, where sophisticated spatial analyses often fail to translate into operational decisions due to lack of implementation pathways (Pan et al., 2023; Lin and Cromley, 2023).

Third, the dashboard interface provides intuitive visualization and decision support that bridges technical spatial analysis and operational management. Interactive dashboards demonstrated by Nicholson et al. (2023) and Elsheikh (2022) show that spatial visualization enhances stakeholder engagement and supports transparent decision-making. The adapted framework extends these dashboard capabilities by integrating real-time monitoring, predictive analytics, and scenario planning within a unified interface. Fourth, the systematic prioritization logic provides transparent, evidence-based criteria for resource allocation that balance efficiency and equity objectives. The composite priority index combines spatial risk factors with demographic vulnerability indicators, ensuring that resource allocation decisions consider both operational efficiency and health equity. This explicit equity integration addresses the limitations of purely efficiency-focused optimization models that may inadvertently exacerbate disparities. Fifth, the framework's cross-sectoral origins bring fresh perspectives from environmental management to healthcare operations. The parallel between environmental compliance hotspots and patient congestion hotspots, between inspection route optimization and ambulance dispatch optimization, and between proactive environmental oversight and preventive healthcare planning suggests that healthcare can benefit from proven methods in other domains. This cross-sectoral learning accelerates innovation by adapting mature methods rather than developing new approaches from scratch (Chiobi, 2016).

6.3 Addressing Methodological Challenges

The adapted framework addresses several methodological challenges identified in the healthcare GIS literature. The temporal data gap problem, highlighted by Anyadi (2022) and Jumadi et al. (2022), is addressed through continuous data feeds from hospital information systems and ambulance dispatch centers that update the spatial database at hourly or finer intervals. This temporal granularity enables time-varying accessibility analysis and dynamic resource allocation that reflects actual demand patterns rather than static snapshots. The modifiable areal unit problem (MAUP) and edge effects, documented by Wang et al. (2023), are mitigated through multiscale analysis that examines patterns at multiple

geographic resolutions (census tracts, grid cells, neighborhoods) and implements buffer zones around study area boundaries to minimize edge artifacts. Sensitivity analysis tests whether conclusions remain robust across different spatial aggregations, ensuring that policy recommendations do not depend on arbitrary geographic unit choices. Computational complexity challenges in optimization algorithms, noted by Oh et al. (2023), are addressed through constraint formulation techniques that tighten lower bounds and reduce solution times while maintaining optimality. For very large urban areas where exact optimization becomes intractable, the framework implements heuristic algorithms that provide near-optimal solutions with guaranteed performance bounds. This pragmatic approach balances analytical rigor with computational feasibility. Data integration challenges are addressed through standardized geocoding protocols, quality control procedures, and data harmonization workflows that consolidate diverse sources into consistent formats. The framework implements automated data validation checks that flag inconsistencies, missing values, or spatial errors for manual review. Privacy protection mechanisms ensure that patient-level data are aggregated to appropriate geographic scales before analysis, maintaining confidentiality while preserving spatial patterns.

6.4 Limitations and Contextual Considerations

Despite its advantages, the adapted framework faces several limitations that require acknowledgment. First, implementation requires substantial data infrastructure including electronic health records, hospital information systems, and ambulance dispatch systems with geocoding capabilities. Healthcare organizations with limited information technology capacity may face barriers to adoption. However, the framework's modular design allows phased implementation, starting with basic hotspot detection and accessibility analysis before adding more sophisticated optimization and real-time monitoring capabilities. Second, the framework's effectiveness depends on data quality and completeness. Inaccurate geocoding, incomplete patient records, or outdated facility information can compromise spatial analyses and lead to suboptimal decisions. Continuous data quality monitoring and validation procedures are essential to maintain system reliability. The framework should include data quality dashboards that alert administrators to potential issues requiring attention. Third, spatial optimization models make simplifying assumptions about patient behavior, travel patterns, and facility operations that may not fully capture real-world complexity. Patients do not always choose the nearest facility, travel times vary with traffic conditions and individual circumstances, and hospital capacity fluctuates with staffing and equipment availability. Sensitivity analysis and scenario planning help assess the robustness of recommendations to these uncertainties, but some degree of model error is inevitable. Fourth, equity considerations involve value judgments about how to balance competing objectives and which population groups deserve priority attention. The framework provides analytical tools to quantify disparities and evaluate tradeoffs, but ultimate decisions about equity weights and priority criteria require stakeholder input and policy deliberation. The dashboard should facilitate transparent discussion of these value choices rather than obscuring them behind technical complexity. Fifth, the framework focuses on spatial dimensions of healthcare access while recognizing that non-spatial barriers, financial constraints, language barriers, cultural factors, discrimination, also profoundly affect healthcare utilization and outcomes. Spatial optimization can improve geographic accessibility but cannot address these non-spatial barriers. Comprehensive equity strategies must integrate spatial intelligence with interventions targeting non-spatial access barriers.

7. Implications for Practice

7.1 Recommendations for Hospital Administrators

Hospital administrators seeking to implement geospatial intelligence for patient flow optimization should adopt a phased approach that builds capabilities incrementally. Initial implementation should focus on establishing the data foundation by integrating existing information systems, geocoding

patient and facility data, and developing basic spatial databases. Even simple hotspot maps showing emergency department congestion patterns or ambulance response time clusters can provide valuable operational insights with modest technical investment. Second-phase implementation adds interactive dashboards that visualize spatial patterns and provide decision-support interfaces for operational management. Dashboards should prioritize user-friendly design and mobile accessibility to ensure adoption by busy administrators and frontline staff. Pilot testing with small user groups helps identify usability issues and refine interfaces before full deployment. Training programs ensure that users understand how to interpret spatial visualizations and translate them into operational decisions. Third-phase implementation incorporates optimization algorithms for resource allocation and facility location planning. This phase requires more sophisticated analytical capabilities and may benefit from partnerships with academic institutions or specialized consulting firms. However, the investment can yield substantial returns through improved efficiency and equity. Administrators should establish clear performance metrics to evaluate optimization outcomes and demonstrate value to stakeholders. Throughout implementation, administrators should emphasize the closed-loop feedback mechanisms that distinguish this framework from one-time spatial analyses. Establishing protocols for continuous data updates, outcome tracking, and model refinement ensures that the system improves over time rather than becoming outdated. Regular validation exercises comparing predictions against observed outcomes build confidence in the system and identify areas for improvement.

7.2 Policy Implications for Health Equity

The framework provides health equity officers and policymakers with systematic tools for monitoring disparities, identifying vulnerable populations, and evaluating interventions. Equity surveillance dashboards should become standard components of health system accountability, tracking accessibility Gini coefficients and disparity metrics alongside traditional quality and efficiency indicators. Public reporting of equity metrics creates transparency and accountability for reducing disparities. Facility location decisions should explicitly incorporate equity analysis using the spatial optimization methods demonstrated in this framework. Rather than siting new facilities based solely on efficiency criteria or political considerations, health authorities should use location-allocation models that maximize accessibility for underserved populations. The interactive scenario planning capabilities enable stakeholders to explore tradeoffs between efficiency and equity, supporting informed deliberation about value priorities. Resource allocation policies should adopt the composite priority index approach that combines spatial risk factors with demographic vulnerability indicators. This systematic prioritization ensures that limited resources flow to areas with greatest need rather than following historical patterns or political influence. Transparent priority criteria build public trust and support evidence-based decision-making. Transportation assistance programs and mobile health services should target the geographic areas and population groups identified through spatial equity analysis as facing compounded disadvantages. Rather than providing services uniformly across all areas, targeted interventions concentrate resources where they can achieve greatest equity impact. Spatial analysis helps optimize the location and scheduling of mobile clinics, transportation routes, and outreach programs.

7.3 Integration with Emergency Preparedness Planning

The framework's capabilities extend beyond routine operations to emergency preparedness and disaster response. Hotspot detection algorithms can identify areas vulnerable to healthcare system collapse during surge events such as pandemics, natural disasters, or mass casualty incidents. Capacity-constrained optimization models help planners evaluate alternative surge strategies including facility expansion, patient transfer protocols, and temporary facility deployment. Scenario planning tools enable emergency managers to test response plans under different disaster scenarios, identifying bottlenecks and resource gaps before crises occur. For example, planners can simulate a major

earthquake affecting specific neighborhoods, modeling how patient surge would affect hospital capacity and ambulance response times. The spatial analysis reveals which facilities would become overwhelmed and where temporary medical stations should be deployed to maintain coverage. Real-time monitoring during emergencies provides situational awareness that supports adaptive response. The dashboard displays current facility status, patient flow patterns, and resource availability across the affected region, enabling emergency operations centers to coordinate response efforts. Integration with ambulance dispatch systems ensures that patients are directed to facilities with available capacity rather than overwhelming already-stressed hospitals. Post-event analysis using the framework's spatial methods helps identify lessons learned and improve future preparedness. Comparing predicted patterns against actual outcomes reveals where models performed well and where they require refinement. Spatial analysis of response effectiveness across different neighborhoods identifies equity issues in emergency response that require attention in future planning.

8. Limitations and Future Research

8.1 Current Limitations

Several limitations of the adapted framework warrant acknowledgment and suggest directions for future research. First, the framework has been developed conceptually by adapting Odutayo's (2020) environmental compliance system to healthcare operations, but has not yet been implemented and validated in actual hospital settings. Empirical validation through pilot implementations is essential to assess real-world performance, identify implementation barriers, and refine methods based on operational experience. Future research should conduct case studies in diverse urban hospital systems to evaluate the framework's effectiveness across different contexts. Second, the framework focuses primarily on spatial and temporal dimensions of patient flow while giving less attention to clinical complexity and patient acuity variations. Emergency department patients range from minor injuries to life-threatening conditions, requiring different resources and care pathways. Future research should integrate clinical classification systems with spatial analysis to develop acuity-aware resource allocation models that account for both geographic patterns and clinical needs. Third, the framework's optimization algorithms assume relatively stable relationships between demand patterns, facility capacities, and travel times. However, healthcare systems face disruptive changes from technology adoption, policy reforms, and demographic shifts that may alter these relationships. Future research should develop adaptive optimization methods that detect structural changes and automatically recalibrate models to maintain accuracy under evolving conditions. Fourth, the framework addresses health equity primarily through spatial accessibility analysis while recognizing that non-spatial barriers also profoundly affect healthcare utilization. Future research should develop integrated models that combine spatial accessibility with measures of financial access, cultural competence, language services, and discrimination to provide comprehensive equity assessment. Mixed-methods approaches combining spatial analysis with qualitative research on patient experiences would enrich understanding of access barriers. Fifth, the framework's data requirements may pose challenges for resource-constrained healthcare systems, particularly in low- and middle-income countries. Future research should explore simplified implementations using readily available data sources such as mobile phone records, social media data, or satellite imagery to extend geospatial intelligence capabilities to settings with limited health information infrastructure.

8.2 Future Research Directions

Several promising research directions could extend and enhance the adapted framework. First, integration of artificial intelligence and machine learning methods could improve predictive accuracy and automate pattern recognition. Deep learning models trained on historical patient flow data might detect subtle patterns that traditional statistical methods miss, enabling more accurate demand

forecasting and earlier detection of emerging hotspots. The GeoAI approaches reviewed by Osei et al. (2023) suggest substantial potential for AI-enhanced spatial analysis in healthcare. Second, incorporation of social determinants of health data could enrich equity analysis by linking spatial accessibility patterns with broader social and economic factors affecting health outcomes. Integrating data on housing quality, food access, environmental exposures, and social cohesion with healthcare accessibility measures would provide more comprehensive understanding of health equity and identify opportunities for cross-sectoral interventions. Third, development of patient-centered accessibility metrics that account for individual preferences, constraints, and experiences could complement facility-centered measures. While current methods focus on minimizing travel distance or time, patients may prioritize other factors such as provider continuity, cultural concordance, or service quality. Patient-reported accessibility measures collected through surveys or mobile apps could validate and refine spatial models. Fourth, extension to specialized services beyond general hospital care could address accessibility challenges for specific populations. Spatial analysis of access to mental health services, substance abuse treatment, maternal health care, or pediatric specialties would reveal service-specific gaps requiring targeted interventions. The methods demonstrated for general hospital accessibility should translate to specialized services with appropriate adaptations. Fifth, longitudinal studies tracking how spatial accessibility patterns evolve over time and how changes affect health outcomes would strengthen causal inference about the impacts of spatial interventions. Natural experiments where facility openings, closings, or expansions create exogenous variation in accessibility could provide rigorous evidence on the health effects of spatial access improvements. Sixth, comparative international research examining how the framework performs across different healthcare systems, urban forms, and cultural contexts would assess generalizability and identify context-specific adaptations. Healthcare systems vary dramatically in organization, financing, and delivery models, and spatial optimization strategies may require tailoring to local institutional arrangements.

9. Conclusion

This paper has proposed and developed a novel application of geospatial intelligence to hospital patient flow optimization and health equity monitoring by adapting Odutayo's (2020) closed-loop GIS decision-support framework from environmental compliance to healthcare operations. The adapted framework integrates five interconnected components—data acquisition and harmonization, hotspot detection, interactive dashboards, resource prioritization, and continuous feedback mechanisms, into a systematic approach for transforming reactive patient flow management into proactive, spatially intelligent operations. The comprehensive literature review synthesized evidence from over 18 recent studies demonstrating the effectiveness of GIS methods for healthcare accessibility analysis, emergency medical services optimization, and equity monitoring. Key findings include: spatial accessibility modeling consistently identifies significant geographic disparities in healthcare access; optimization-based facility location studies demonstrate potential improvements of 5-15% in population coverage and accessibility; real-time monitoring systems using crowd sensed data achieve over 90% accuracy in demand prediction; congestion-constrained models produce more equalized demand distribution than capacity-blind approaches; and temporal dynamics significantly affect accessibility patterns and policy conclusions.

The theoretical framework demonstrates how each component of Odutayo's (2020) environmental compliance system translates to healthcare operations. Patient congestion hotspots parallel environmental violation clusters, hospital resource allocation mirrors inspection prioritization, and emergency preparedness planning resembles proactive environmental oversight. The closed-loop architecture ensures continuous improvement through systematic feedback mechanisms, addressing

the operationalization gap identified in the literature where sophisticated spatial analyses often fail to translate into operational decisions. The methodology section detailed a five-phase implementation approach encompassing data acquisition, spatial analysis, dashboard development, resource optimization, and continuous refinement. Specific methods include Getis-Ord Gi statistics for hotspot detection, Local Moran's I for spatial autocorrelation analysis, enhanced 2SFCA for accessibility modeling, composite priority indices for resource allocation, and route optimization algorithms for ambulance dispatch. These methods operationalize the conceptual framework into functional decision-support systems.

Application scenarios demonstrated the framework's utility for emergency department congestion management, ambulance dispatch optimization, facility location planning, and health equity surveillance. Each scenario illustrated how spatial intelligence enables proactive management, evidence-based resource allocation, and systematic equity monitoring. The framework provides hospital administrators with actionable insights for improving operational efficiency while advancing health equity objectives. The discussion synthesized evidence supporting the framework's effectiveness and identified advantages over fragmented GIS applications including continuous improvement through feedback mechanisms, integration of multiple spatial methods, intuitive visualization interfaces, systematic prioritization logic, and cross-sectoral learning from environmental management. The framework addresses methodological challenges including temporal data gaps, modifiable areal unit problems, computational complexity, and data integration issues while acknowledging limitations related to data requirements, model assumptions, and non-spatial access barriers.

Implications for practice emphasize phased implementation starting with basic spatial analysis and progressing to sophisticated optimization, the importance of closed-loop feedback mechanisms, explicit incorporation of equity analysis into facility location and resource allocation decisions, and integration with emergency preparedness planning. Future research directions include empirical validation through pilot implementations, integration of clinical complexity and patient acuity, development of adaptive optimization methods, incorporation of social determinants of health, patient-centered accessibility metrics, longitudinal outcome studies, and comparative international research.

The adapted closed-loop GIS framework offers hospital administrators and public health officials a systematic, evidence-based approach to patient flow optimization and health equity monitoring. By leveraging proven geospatial methods from environmental management and synthesizing recent advances in healthcare GIS, this framework provides a scalable solution for improving operational efficiency, reducing health disparities, and enhancing emergency preparedness in urban hospital systems. As healthcare organizations increasingly recognize the spatial dimensions of operational challenges and equity concerns, geospatial intelligence will become an essential component of effective hospital management and health system planning. The framework presented in this paper provides a roadmap for realizing this potential through systematic spatial analysis, interactive visualization, evidence-based optimization, and continuous improvement.

References

- Anyadi, E. (2022). Time-varying spatial accessibility of primary healthcare services based on spatiotemporal variations in demand, supply, and traffic conditions: A case study of Seoul, South Korea. *Journal of Transport & Health*, 28, 101531. <https://doi.org/10.1016/j.jth.2022.101531>
- Chea, N., & Kim, K. (2023). Assessing trauma center accessibility in the Southeastern region of the U.S. to improve healthcare efficacy using an anti-covering approach. *PLOS Global Public Health*, 3(8), e0002230. <https://doi.org/10.1371/journal.pgph.0002230>

- Du, M., Zhao, S., & Huang, Y. (2023). Exploring equity in a hierarchical medical treatment system: A focus on determinants of spatial accessibility. *ISPRS International Journal of Geo-Information*, 12(8), 318. <https://doi.org/10.3390/ijgi12080318>
- Elsheikh, A. A. (2022). A GIS tool that provides intelligent solutions in emergency departments during COVID-19. *Journal of Geographic Information System*, 14(3), 287-304. <https://doi.org/10.4236/jgis.2022.143015>
- Hashtarkhani, S., Kiani, B., Bergquist, R., Bagheri, N., VafaeiNejad, R., & Tara, M. (2023). Enhancing health care accessibility and equity through a geoprocessing toolbox for spatial accessibility analysis: Development and case study. *JMIR Public Health and Surveillance*, 9, e51727. <https://doi.org/10.2196/preprints.51727>
- Joseph, C. (2013). From fragmented compliance to integrated governance: A conceptual framework for unifying risk, security, and regulatory controls. *Scholars Journal of Engineering and Technology*, 1(4), 238–250.
- Jumadi, J., Hadi, M. P., Caraka, R. E., Taufiq, A., Ansori, M. Y. Z., Yusuf, M., & Sakti, A. D. (2022). Spatiotemporal accessibility of COVID-19 healthcare facilities in Jakarta, Indonesia. *Sustainability*, 14(21), 14478. <https://doi.org/10.3390/su142114478>
- Lahmar, M., Boukerzaza, M., & Hafsi, R. (2020). A GIS-based multicriteria spatial decision support system model to handle health facilities resources: Case of crisis management in Batna, Algeria. *Geographia Technica*, 15(1), 160-171. https://doi.org/10.21163/GT_2020.151.16
- Lin, Y., & Cromley, R. G. (2023). Using the transportation problem to build a congestion/threshold constrained spatial accessibility model. *Journal of Transport Geography*, 112, 103691. <https://doi.org/10.1016/j.jtrangeo.2023.103691>
- Nicholson, M., Fricker, T., Batra, M., Celermajer, D. S., Rao, P., Saxena, A., & Weintraub, R. G. (2023). An interactive geographic information system to inform optimal locations for healthcare services. *PLOS Digital Health*, 2(5), e0000253. <https://doi.org/10.1371/journal.pdig.0000253>
- Chiobi, N. F. (2016). Integrating geospatial analytics and business intelligence for workflow optimization in pharmaceutical supply chains. *Scholars Journal of Economics, Business and Management*, 3(12), 709–723. <https://doi.org/10.36347/sjebm.2016.v03i12.009>
- Odutayo, M.O. (2020). Geospatial Intelligence for Environmental Compliance: Applying GIS to Regulatory Monitoring and Waste Management in Nigeria. *The American Journal of Management and Economics Innovations*, 2(09), 70–79. Retrieved from <https://theamericanjournals.com/index.php/tajmei/article/view/6702>
- Oh, H., Kim, K., & Chea, N. (2023). Location planning of emergency medical facilities using the p-dispersed-median modeling approach. *ISPRS International Journal of Geo-Information*, 12(12), 497. <https://doi.org/10.3390/ijgi12120497>
- Osei, F. B., & Sasidharan, M. (2023). Geospatial health (GeoHealth): Current trends, methods, and applications. *Tropical Medicine and Infectious Disease*, 8(7), 366. <https://doi.org/10.3390/tropicalmed8070366>
- Pan, J., Zhao, H., Wang, X., & Shi, X. (2023). Location-allocation modelling for rational health planning: Applying a two-step optimization approach to evaluate the spatial accessibility improvement of newly added tertiary hospitals in a metropolitan city of China. *Social Science & Medicine*, 338, 116296. <https://doi.org/10.1016/j.socscimed.2023.116296>
- Shi, L., Zhang, D., Shi, Y., & Chen, B. (2022). Spatial accessibility patterns to public hospitals in Shanghai: An improved gravity model. *The Professional Geographer*, 74(2), 249-264. <https://doi.org/10.1080/00330124.2021.2000445>

- Shou, Z., Di, X., Ye, J., Zhu, H., Zhang, H., & Hampshire, R. (2023). CrowdQ: Modeling crowdedness in emergency departments using crowdsensing data. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies*, 7(3), 1-28. <https://doi.org/10.1145/3610875>
- Stansberry, S. A., Haddad, L. M., & Schmiede, S. J. (2023). Using geographic information systems in health disparities research: Access to care considerations. *Research in Nursing & Health*, 46(6), 647-658. <https://doi.org/10.1002/nur.22348>
- Wang, K., Bai, J., & Dang, A. (2023). Multiscale analysis of spatial accessibility to acute hospitals in Carinthia, Austria. *ISPRS International Journal of Geo-Information*, 12(12), 491. <https://doi.org/10.3390/ijgi12120491>
- Wang, X., Yang, H., Duan, Z., & Pan, J. (2022). Assessing the spatial accessibility of urban medical facilities in multi-level and multi-period scales based on web mapping API and an improved potential model. *ISPRS International Journal of Geo-Information*, 11(11), 545. <https://doi.org/10.3390/ijgi11110545>
- Xu, W., Wu, W., Dong, Y., Li, Y., & Liu, Y. (2022). Identifying the vulnerable regions of emergency medical services based on the three-stage of accessibility: A case study in Xi'an, China. *International Journal for Equity in Health*, 21(1), 65. <https://doi.org/10.1186/s12939-022-01653-0>
- Yu, H., Fotheringham, A. S., Li, Z., Oshan, T., Kang, W., & Wolf, L. J. (2023). Spatial vertical equity in public general hospitals: Towards a sustainable healthcare system. *Land*, 12(8), 1498. <https://doi.org/10.3390/land12081498>